


NOTES:

1. BALLAST RETAINING BAR MUST PROVIDE CONSTANT COMPRESSION ON WATER CUT-OFF MASTIC.
2. BALLAST RETAINING BAR MUST EXTEND ABOVE GRAVEL SURFACE SUFFICIENTLY TO RETAIN GRAVEL AND PREVENT GRAVEL MIGRATION.
3. REFER TO LOCAL CODES FOR PROPER DRAINAGE REQUIREMENTS.
4. SLOTS IN BALLAST RETAINING BAR MUST BE FLUSH OR SLIGHTLY BELOW MEMBRANE LEVEL.

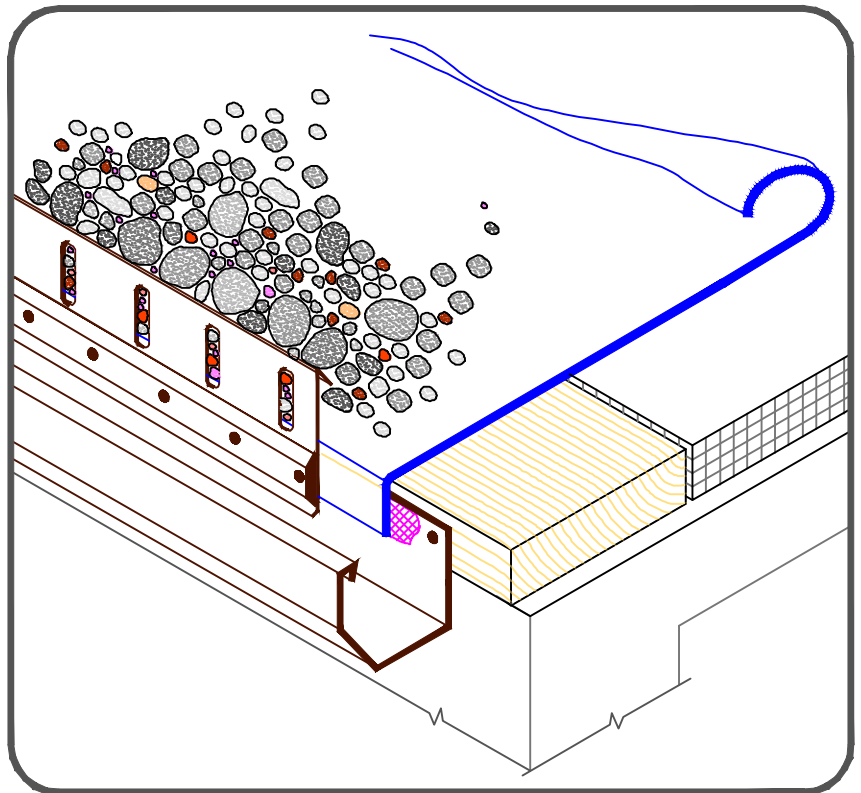

	<p>EPDM</p>	<p>SURE-SEAL BALLAST RETAINING BAR</p>		<p>DETAIL NO.</p>
	<p>APPROVED SUBSTRATE</p>			<p>B-1D</p>
	<p>SEE NOTE(S)</p>	<p>For additional information, refer to Specifications</p>	<p>BALLASTED EPDM</p>	