


CARLISLE'S

HINGED TARGET[®] SUMP

FOR TAPERED POLYISO SYSTEMS

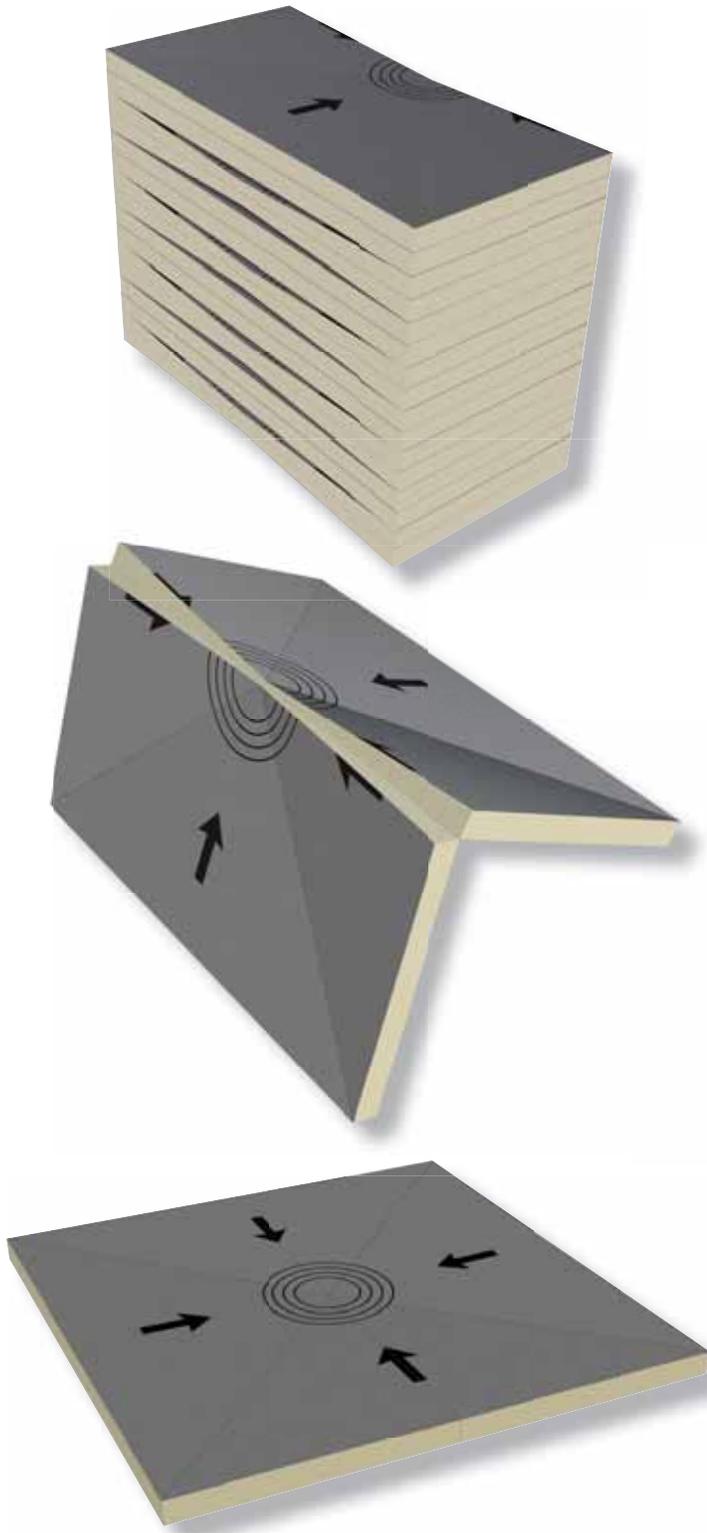

Reduces Field Labor

- One piece, ships 4' x 8', folds out to 8' x 8'
- Pre-cut, ready to install
- Factory assembled
- Concentric circles simplify drain cutout

Completely Eliminates Waste

- Reduces dumpster fees
- Reduces impact on local landfills

Custom Sizes Available for Optimum Drainage

- Multiple thicknesses and slopes to accommodate specific job conditions
- Flexible starts at the drain ½", 1", 1½", or 2"
- FM Class 1 Assemblies – 1½" or 2" starts are available
- Perimeter edge thicknesses 1½", 2", 2½", 3", 3½"
- Available with Carlisle's Tapered HP and Tapered SecurShield™ facers in 20 or 25 psi

Hinged Target Sump			
Typical Properties and Characteristics			
Minimum Thickness	Panel	Thickness	Pieces Per Package*
½" Start	X	½"–1½"	7
	SS	½"–2"	5
	Q	½"–2½"	4
1" Start	A	1"–1½"	7
	G	1"–2"	5
	S	1"–2½"	4
	XX	1"–3"	3
1½" Start	B	1½"–2"	5
	Y	1½"–2½"	4
2" Start	C	2"–2½"	4
	H	2"–3"	3
	TT	2"–3½"	3

* Ships in 4' x 8' pallets, in stack heights of 24" max.

Investing in Roofing Solutions for Over 45 Years

800-479-6832 • P.O. Box 7000 • Carlisle, PA 17013 • Fax: 717-245-7053 • www.carlisle-syntec.com

Carlisle is a trademark of Carlisle.

REPRINT CODE: 605445 - "Hinged Target Sump Sell Sheet" - 120310 © 2010 Carlisle.



Carlisle Syntec