


SecurEdge™ 200 Coping

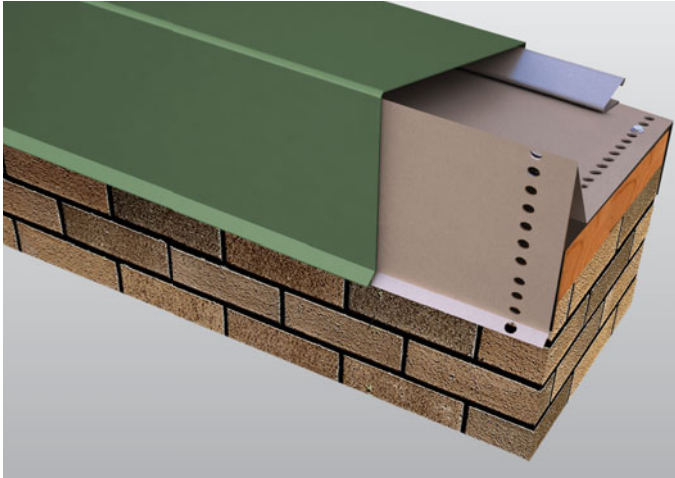

Overview

Carlisle's SecurEdge 200 Coping utilizes a full snap-on design with 20-gauge galvanized steel anchor clips and factory-applied stainless steel springs to ensure long-term positive attachment and ease of installation. It is custom-fabricated to meet your exact job requirements.

Features and Benefits

- » Manufactured in 12' snap-on lengths with no crimping required
- » Pre-punched fastening holes ensure proper attachment to the building substrate
- » Corrosion-resistant stainless steel springs are factory-attached to the anchor clips, providing long-term, positive spring loading
- » A wide variety of warranted colors and finishes are available to match any building
- » Carefully designed and ANSI/SPRI ES-1 tested to comply with the International Building Code
- » Select versions are Factory Mutual (FM) Approved

Installation

For complete installation instructions, refer to Carlisle specifications and details or visit www.carlislesyntec.com.

Finishes

- » Natural mill-finish aluminum
- » Pre-coat Kynar 500® – from Carlisle's standard color chart
- » Premium metallic Kynar®
- » Anodized aluminum – clear, bronze, and black
- » Custom post-painted Kynar finishes available upon request

Quality Assurance

SecurEdge 200 Coping is tested per ANSI/SPRI Test Method RE-3 Pull-Off test for coping. Coping shall be certified by Carlisle to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems Used with Low Slope Roofing Systems. Meets International Building Code. Select versions are Factory Mutual Approved.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For personal assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

SecurEdge 200 Coping

