


SecurEdge™ 200 Fascia System

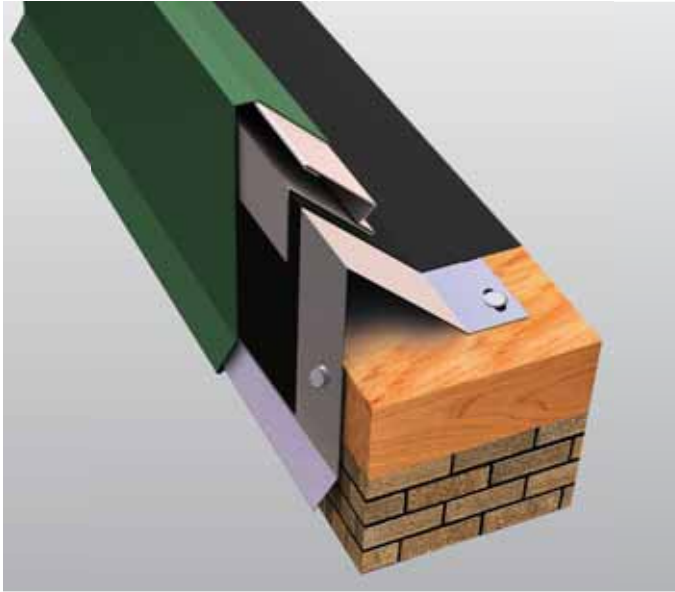

Overview

The new version of SecurEdge 200 Fascia System features a snap-on cover that eliminates crimping, substantially reducing installation time. This formed, two-piece fascia system can be used with all single-ply roof membranes and is especially popular on stone ballast single-ply roofs. Dual attachment points on both the face and roof deck allow for added flexibility when accommodating roof irregularities.

No exposed fasteners, no unsightly cover plates and ease of installation distinguish this ANSI/SPRI ES-1 tested roof edge system.

Features and Benefits

- » No need for the stripping-in or heat-welding that are typical with other systems
- » Manufactured in 12' lengths with pre-punched fastening holes in the galvanized waterdam to ensure correct fastener placement and spacing
- » Available in a wide range of standard colors and finishes
- » Simple snap-on covers with no crimping necessary
- » ANSI/SPRI ES-1 tested to comply with the International Building Code

Installation

For complete installation instructions, refer to Carlisle specifications and details, or visit www.carlisesyntec.com

Finishes

- » Natural mill-finish aluminum
- » Pre-coat Kynar® 500 – from Carlisle's standard color chart
- » Premium metallic Kynar
- » Anodized aluminum – clear, bronze, and black
- » Custom post-painted Kynar finishes available upon request

Quality Assurance

Tested per ANSI/SPRI Test Method RE-2 Pull-Off test for fascia. Fascia shall be certified by Carlisle to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems Used with Low Slope Roofing Systems. Meets International Building Code.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For personal assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

Specifications

Fascia Model	'H' DIM	'X' DIM	No. of Nailers Covered
FA-50	5 1/4" (133 mm)	2 7/8" (73 mm)	1
FA-65	6 3/4" (171 mm)	4 3/8" (111 mm)	2
FA-80	8 1/4" (210 mm)	5 3/8" (149 mm)	3
FA-95	9 3/4" (248 mm)	7 3/8" (187 mm)	4
FA-110	11 1/4" (286 mm)	8 7/8" (225 mm)	5
FA-125	12 3/4" (324 mm)	10 3/8" (264 mm)	6

SecurEdge 200 Fascia System

